


Gru

eva
NOLO

EF8F 186



87000 E8F186

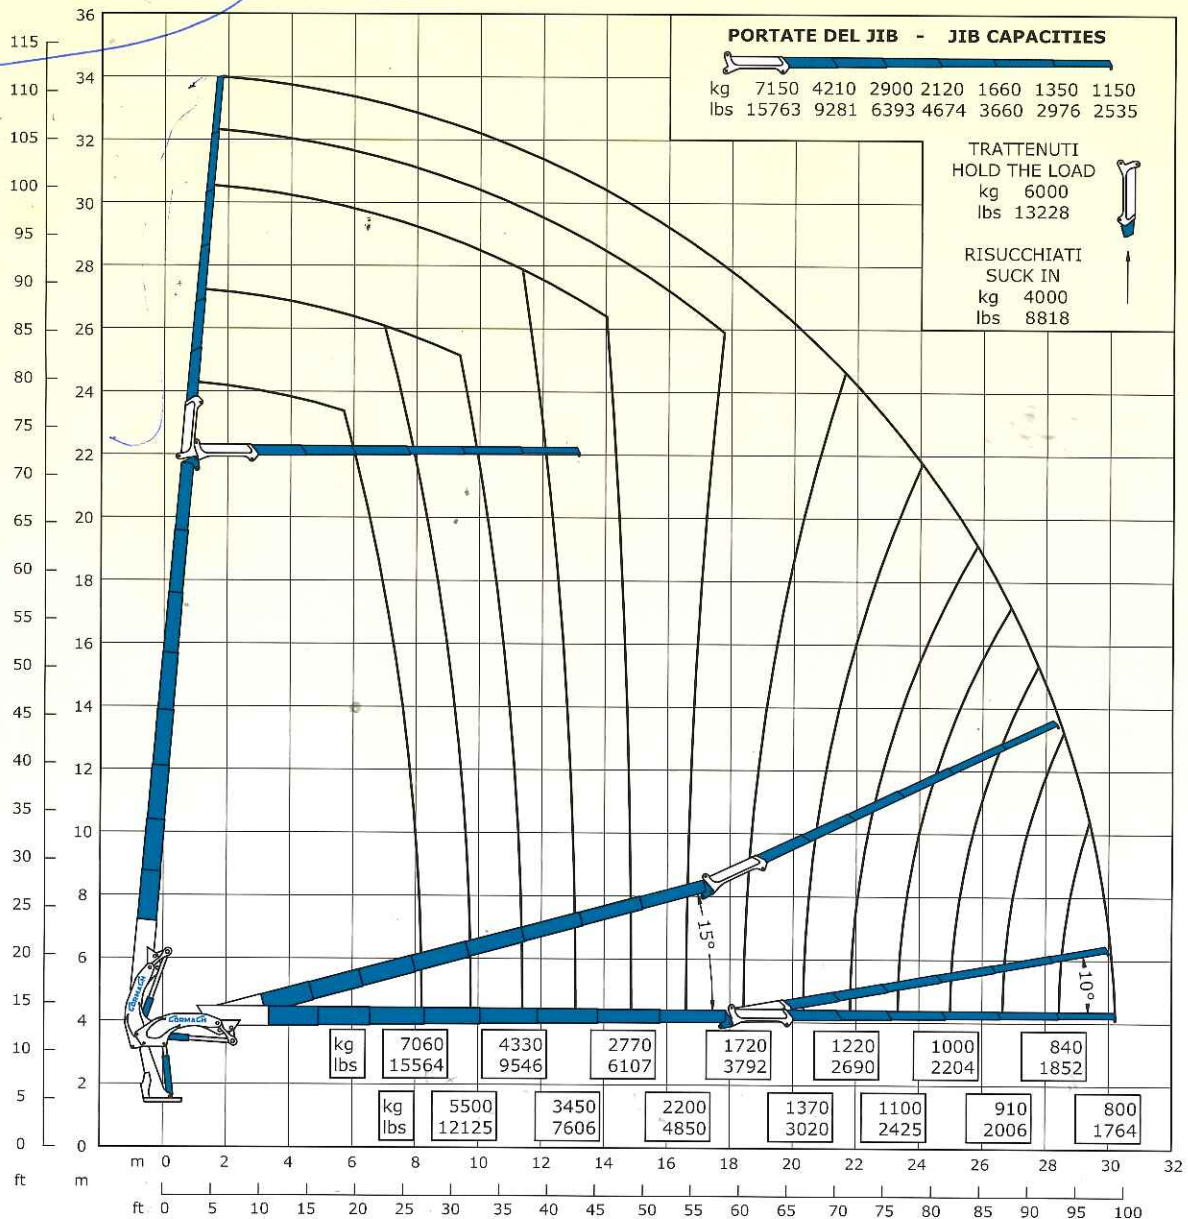

E8F186		
87000 daN*m	629393 Lb*ft	Momento statico massimo al perno torretta - Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle - Max. statisches ubmoment am kransaulenbolzen
30.18 m	99' 0'	Sbraccio idraulico - Hydraulic boom lenght Longueur du bras hydraulique - Hydraulic reichweite
		Sbraccio con prolunghe manuali - Boom length with manual extension Longueur du bras avec rallonges manuelles - Auslegerlänge
8400 daN*m	60790 Lb*ft	Coppia di rotazione - Slew torque - Moment de rotation - Drehmoment
90 sec 360°	90 sec 360°	Tempo di rotazione - Slewing speed - Temp de rotation - Schwenkgeschwindigkeit
3475+2725 mm	11' 5" + 8' 11"	Uscita stabilizzatori - Outriggers extension - Sortie de bequilles - Breite der Abstützung
8550 mm	28' 0"	Larghezza stabilizzatori - Outriggers width - Largeur des bequilles - Gesamtbreite der Abstützung
2550 mm	8' 4"	Lunghezza - Length - Longueur - Gesamtbreite
1840 mm	6' 0"	Larghezza - Width - Largeur - Breite
2930 mm	9' 7"	Altezza - Height - Hauteur - Höhe
10420 kg	22972 lbs	Peso (senza olio e montaggio) - Weight (without oil and fitting) Poids (sans huile et montage) - Gewicht (ohne Öl und ohne)
100 l/min	26 us gal/min	Portata pompa - Pump delivery - Capacité de la pompe - Pumpenleistung
310 bar	4408 psi	Pressione - Pressure - Pression - Druck
260 l	69 us gal	Capacità serbatoio olio - Oil tank capacity - Capacité du réservoir de l'huile - Öl tank inhalt


STANDARD



OPTIONAL



87000 E8

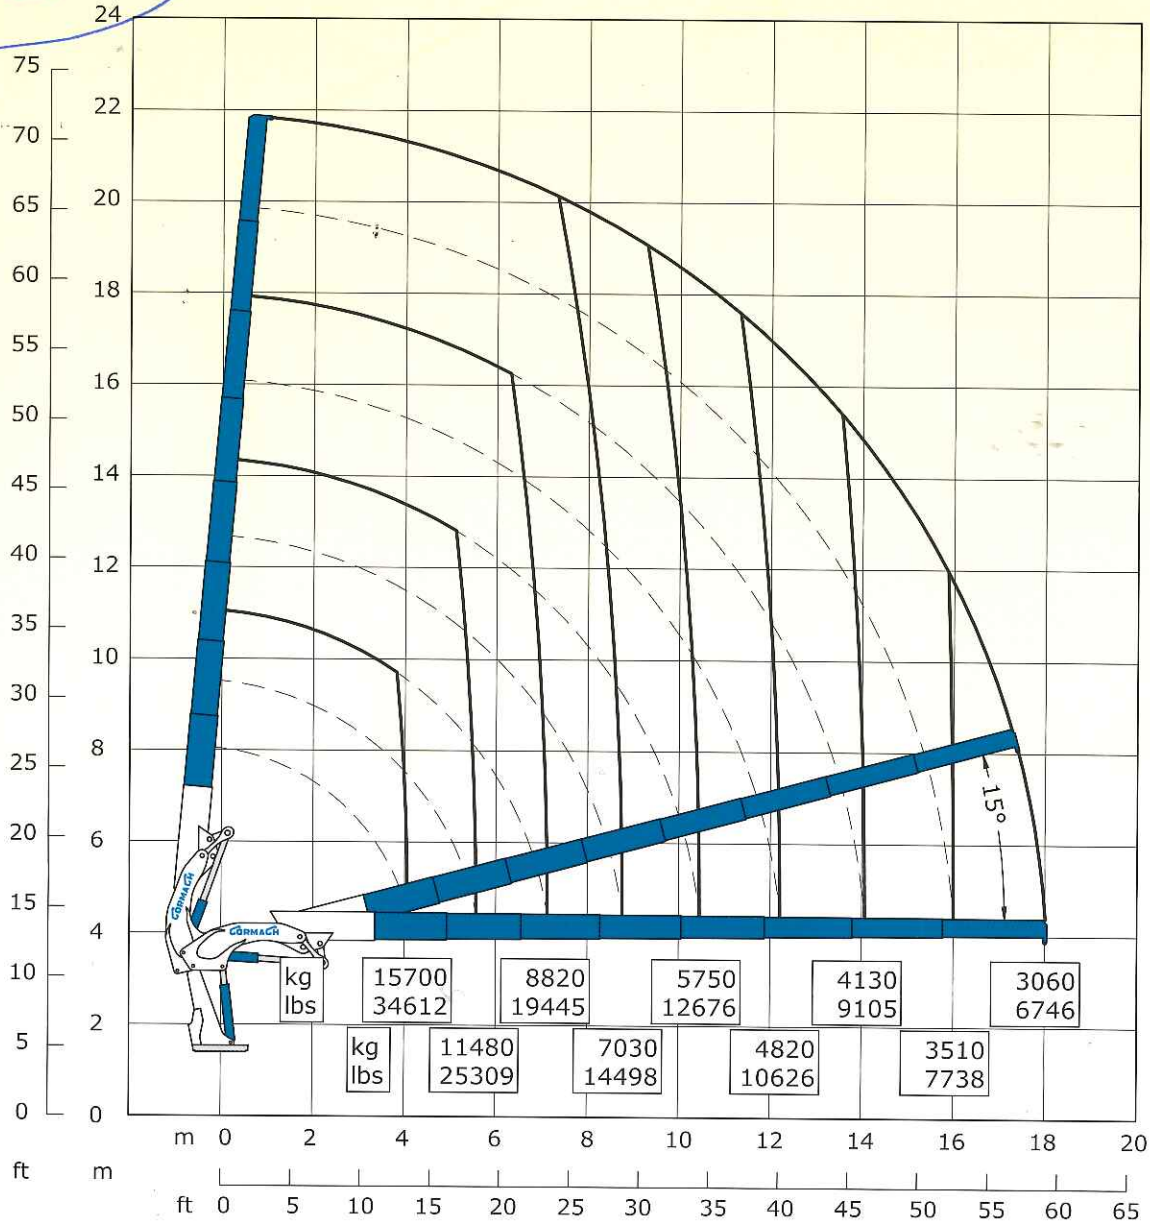

E8		
87000 daN*m	629393 Lb*ft	Momento statico massimo al perno torretta – Max. static moment at the turret pin Moment statique max. a l'axe de la tourelle – Max. statisches ubnmoment am kranseulenbolzen
18.00 m	59' 0"	Sbraccio idraulico – Hydraulic boom length Longueur du bras hydraulique – Hydraulic reichweite
		Sbraccio con prolunghe manuali – Boom length with manual extension Longueur du bras avec rallonges manuelles – Auslegerlänge
8400 daN*m	60790 Lb*ft	Coppia di rotazione – Slew torque – Moment de rotation – Drehmoment
90 sec 360°	90 sec 360°	Tempo di rotazione – Slewing speed – Temp de rotation – Schwenkgeschwindigkeit
3475+2725 mm	11' 5" + 8' 11"	Uscita stabilizzatori – Outriggers extension – Sortie de bequilles – Breite der Abstützung
8550 mm	28' 0"	Larghezza stabilizzatori – Outriggers width – Largeur des bequilles – Gesamtbreite der Abstützung
2535 mm	8' 4"	Lunghezza – Length – Longueur – Gesamtbreite
1840 mm	6' 0"	Larghezza – Width – Largeur – Breite
2650 mm	8' 8"	Altezza – Height – Hauteur – Höhe
8980 kg	19798 lbs	Peso (senza olio e montaggio) – Weight (without oil and fitting) Poids (sans huile et montage – Gewicht (ohne Öl und ohne)
100 l/min	26 us gal/min	Portata pompa – Pump delivery – Capacité de la pompe – Pumpenleistung
310 bar	4408 psi	Pressione – Pressure – Pression – Druck
260 l	69 us gal	Capacità serbatoio olio – Oil tank capacity – Capacité du réservoir de l'huile – Öl tank inhalt

STANDARD



OPTIONAL

